


DN	L	øD	øW	øR	B	f	n-ø
100	229	230	190.5	157.2	22.3	2	8-19

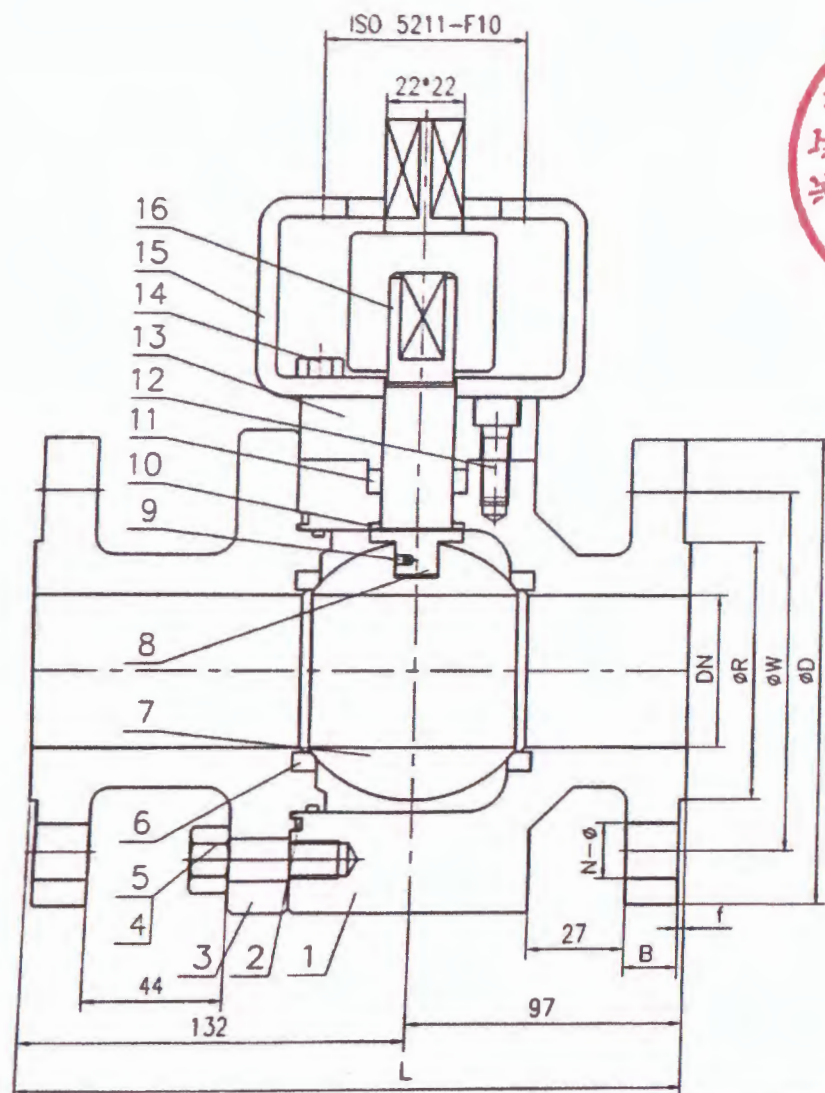

16	Connection	45#
15	Yoke	A36
14	Screw	A193 B8
13	Packing Gland	A182 F316L
12	Screw	A193 B8
11	Packing	Graphite
10	Thrust Washer	PTFE
9	Anti static	SS304
8	Stem	A182 F51
7	Ball	A182 F316L
6	Seat	RPTFE
5	Bolt	A193 B8
4	Nut	A194 8
3	Bonnet	A182 F316L
2	Gasket	316+Graphite
1	Body	A182 F316L
NO.	NAME	MATERIAL

TEST/PROPERTY			TECHNICAL SPECIFICATION		GENERAL INFORMATION	
Shell	3.0	Mpa	Design/Manufacture	API 6D	Type	Ball Valve
Seat seal	2.2	Mpa	Test/inspection	API 598	Size	4"
Backseat seal	/	Mpa	End to end	ASME B16.10	Class	CL 150
Air seal	0.6	Mpa	End connection	ASME B16.5	Ends	RF
Temperature	-29~120	°C	Temp/pressure rating	ASME B16.34	Operation	Lever

Assembly Drawing

2020: 7.02

